

INSTRUCTIONS ON HOW TO CREATE A CORRECT FILE FOR FLAGS AND SYNTHETIC FABRICS

The following instructions are designed to help you create a proper printing file. If still in doubt, please download the template, visit our web site at the FAQ section, activate the File Verification with an operator or call our Support Service.

1 FILE FORMAT

Our systems only process PDF format files - not password protected.

2 FORMAT ORIENTATION

File format orientation must match the choice indicated at the time of the order - portrait or landscape. This is important in order to correctly position additional accessories, such as sleeves, eyelets, etc.

3 TEMPLATE

During the customisation phase of sizes on the web site, our system automatically creates a PDF template. We suggest you download the file, add your own graphics and save the file again in PDF format. In this way, a correct file is generated. Be careful not to place graphics in the bleed area, as they will not show on the finished product.

4 PANELING

Paneling is not foreseen for this type of support.

5 COLOURS

The same colour can appear slightly different depending on the printing media. This is due to the material physical composition, i.e. natural fabrics do absorb more ink compared to synthetic ones.

All files must be sent in CMYK (cyan, magenta, yellow and black), with the printing profile in Fogra 27. The Images which are in RGB or in PANTONE colours shall be automatically converted with the standard separation profile.

6 RESOLUTION


File best resolution for printing large formats is between 100 and 150 dpi.

7 ADDITIONAL INFORMATION

The minimum printing area is 0,5 pt. Flags and fabrics are printed only on one side. Transparency of the material is 70%. If you have selected fabrics: nautical flag sheet, deluxe flag sheet.


8 MARGINS AND BLEED AREA

Flags and Synthetic fabrics require a PDF file in 1:1 scale +1 mm bleed area on each side. Distance of texts from cutting border must be 3 mm.

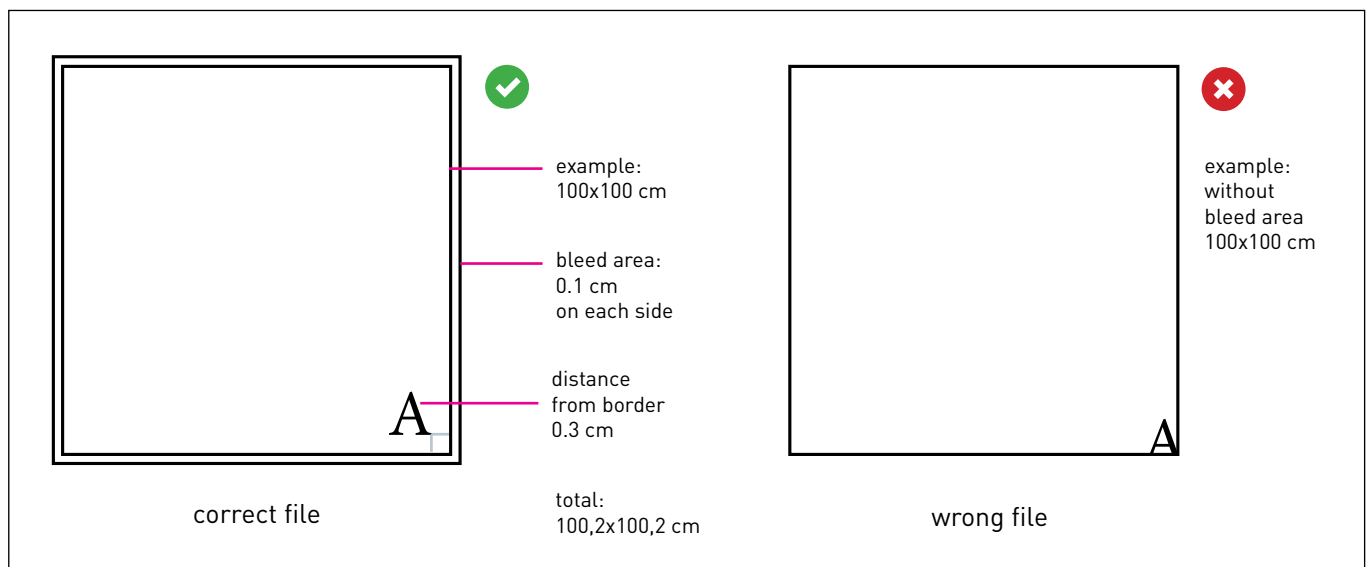


IF YOU HAVE SELECTED FABRICS: NAUTICAL FLAG SHEET, DELUXE FLAG SHEET


In case of anti-fraying stitch or double stitching seam, +2 cm and +1 mm bleed area must be added on each side.

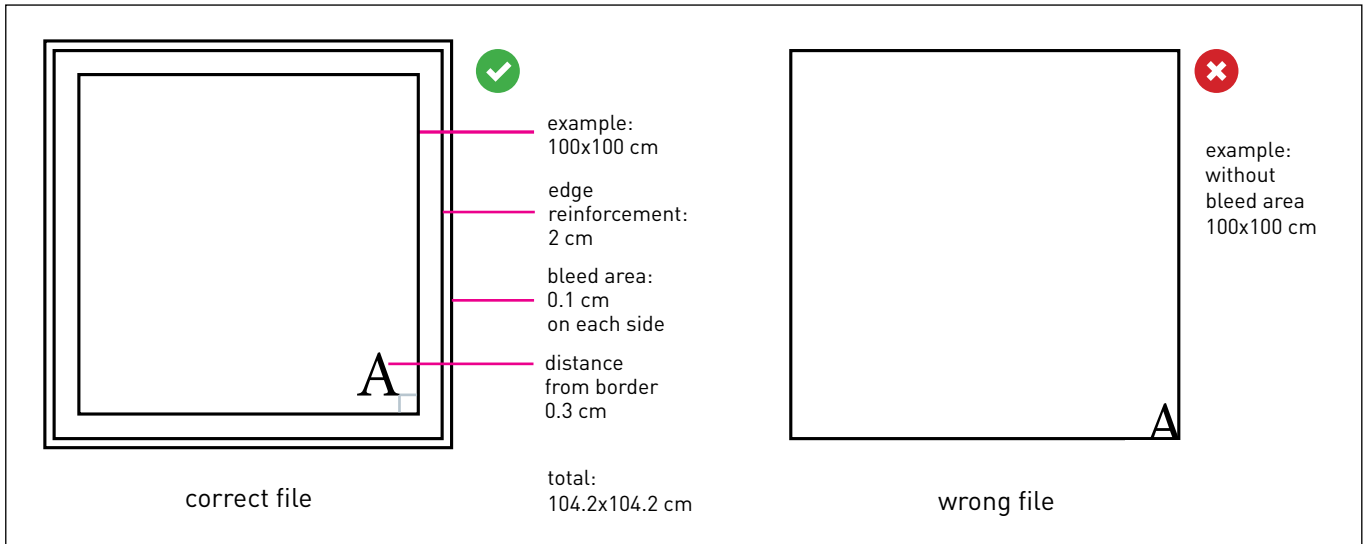

In case of sleeve, +5 cm must be added on the loop side, +1 mm bleed area on each side.

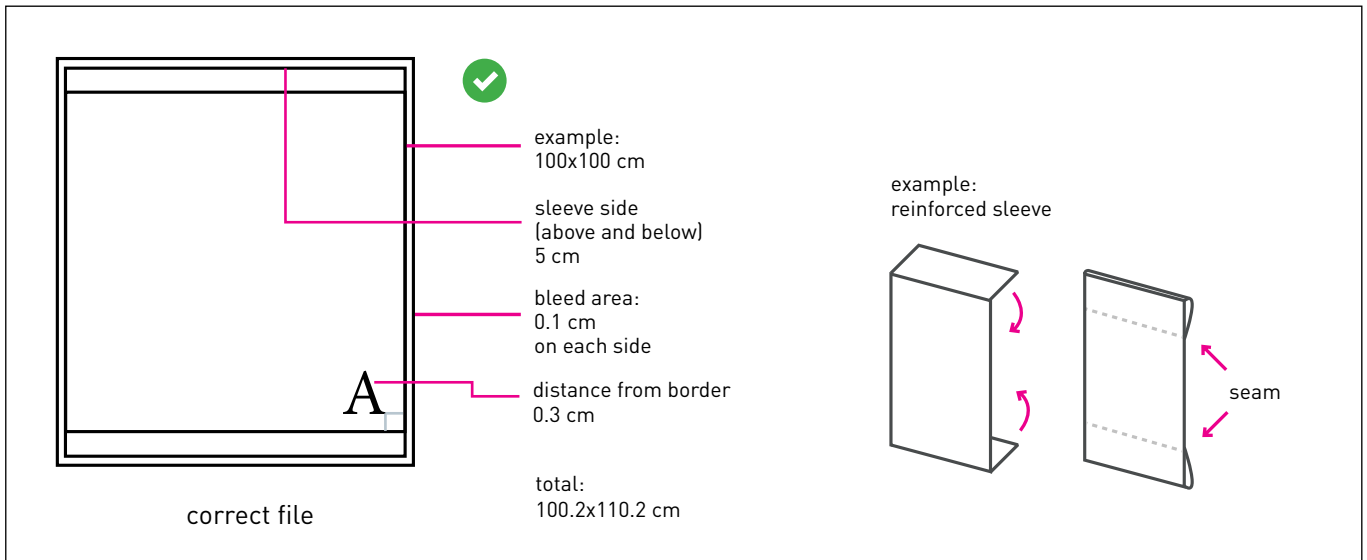

Accessories as eyelets and pull backs are applied over the band. Eyelets are 2,3cm in diameter and are positioned 0,5cm from the margin, while the band has 3cm surmount on the flag.

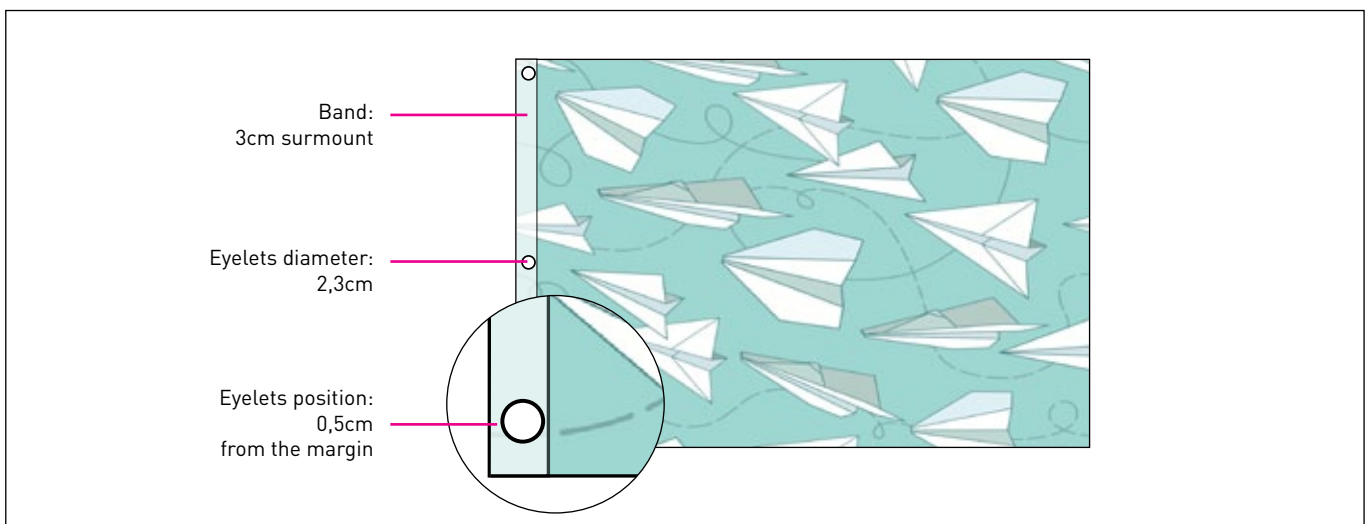

IF YOU HAVE SELECTED GONFOLGON OR STANDARD TNT LIGHT FLAGS

In case of anti-fraying stitch +2 cm and +1 mm bleed area must be added on each side.

Be reminded that for Gongfolgon and Standard TNT light flags do not come with any special treatments such as double stitching or loops, and it is not possible to add accessories such as eyelets or pull backs.

